


# HORON FIT 30 XT



Low-profile

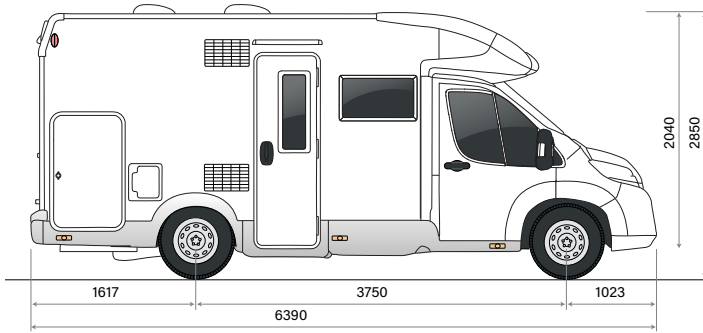

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2845
PAY LOAD (KG)	655
WHEELBASE (MM)	3750
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S + Intelligent Speed Assist
ABS / ESC / TRACTION+	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	PACK HORON FIT
PAINTED FRONT BUMPER	PACK HORON FIT
FOG LIGHTS	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay
<b>DIMENSIONS AND PLACES</b>	
AUXILIARY BED IN DINETTE	O
REAR BED (CM)	-
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	O 201x104(97)
ELEVATING BED (CM)	190x142
ADDITIONAL SEAT REAR BED	-
LOCKER (USEFUL OPENING, CM)	170x68 - 120x68
MAX. INTERNAL GARAGE HEIGHT (CM)	219
FLOOR / WALLS / ROOF THICKNESS (CM)	5.4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S
<b>INSTALLATIONS</b>	
BURNERS	2
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(120) / 100
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	137
COMPRESSOR FRIDGE (L)	-
STANDARD HEATING SYSTEM	Truma Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	-
SHOWER TRAY WITH DOUBLE DRAIN	-
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
<b>SKYLIGHT</b>	
PANORAMIC ROOF (MM)	PACK HORON FIT (1000x800)
REAR SKYLIGHT (MM)	S (400x400)
OBLÒ DINETTE (MM)	-
CENTRAL SKYLIGHT (MM)	S (400x400)
SKYLIGHT SHOWER (MM)	28x28
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S
<b>EQUIPMENTS</b>	
PLEATED CAB BLIND	PACK HORON FIT
REAR-VIEW CAMERA	S
SOLAR PANEL	PACK HORON FIT
AWINING	PACK OPEN AIR
BEDS WITH STAVES	-
INTERNAL LED LIGHTENING	S
<b>EXTERIORS</b>	
ENTRANCE DOOR WITH FIXED WINDOW	S
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	-
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# HORON FIT 81 P



Low-profile

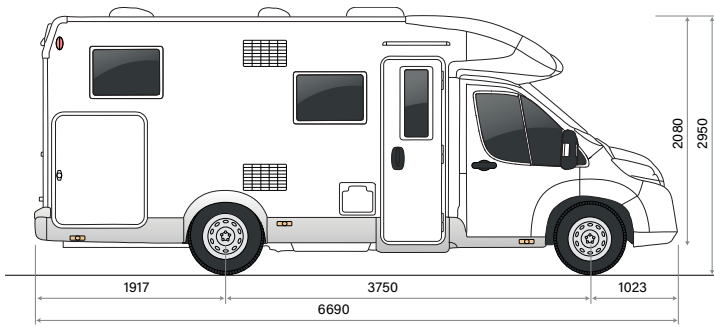

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2865
PAY LOAD (KG)	635
WHEELBASE (MM)	3750
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S + Intelligent Speed Assist
ABS / ESC / TRACTION+	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	PACK HORON FIT
PAINTED FRONT BUMPER	PACK HORON FIT
FOG LIGHTS	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE	O
REAR BED (CM)	201x79 - 201x79 - 130x199
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	O 188x101(50)
ELEVATING BED (CM)	- / O 190x90
ADDITIONAL SEAT REAR BED	-
LOCKER (USEFUL OPENING, CM)	120x90 - 120x90
MAX. INTERNAL GARAGE HEIGHT (CM)	120
FLOOR / WALLS / ROOF THICKNESS (CM)	5.4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

## INSTALLATIONS

BURNERS	2
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100) / 90
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	137
COMPRESSOR FRIDGE (L)	-
STANDARD HEATING SYSTEM	Truma Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	-
SHOWER TRAY WITH DOUBLE DRAIN	-
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S

## SKYLIGHT

PANORAMIC ROOF (MM)	PACK HORON FIT (1000x800)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
OBLÒ DINETTE (MM)	S (700x500) / -
CENTRAL SKYLIGHT (MM)	S (400x400) / - with elevating bed
SKYLIGHT SHOWER (MM)	28x28
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

## EQUIPMENTS

PLEATED CAB BLIND	PACK HORON FIT
REAR-VIEW CAMERA	S
SOLAR PANEL	PACK HORON FIT
AWINING	PACK OPEN AIR
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.


# HORON FIT 91 P



Low-profile

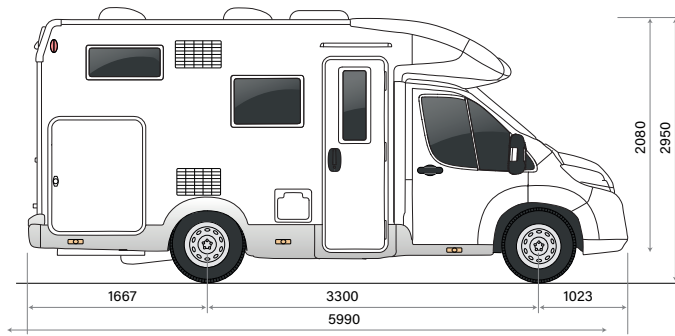

2150 — 5990

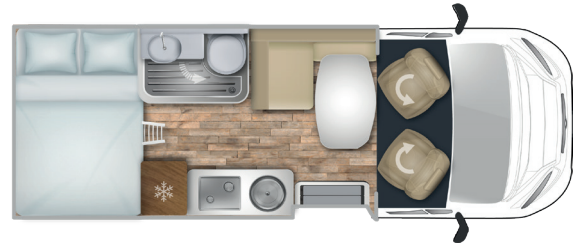

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2815
PAY LOAD (KG)	685
WHEELBASE (MM)	3300
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S + Intelligent Speed Assist
ABS / ESC / TRACTION+	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	PACK HORON FIT
PAINTED FRONT BUMPER	PACK HORON FIT
FOG LIGHTS	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE	O
REAR BED (CM)	201x129(119)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	O 188x101(50)
ELEVATING BED (CM)	- / O 190x90
ADDITIONAL SEAT REAR BED	-
LOCKER (USEFUL OPENING, CM)	125x65 - 125x95
MAX. INTERNAL GARAGE HEIGHT (CM)	125
FLOOR / WALLS / ROOF THICKNESS (CM)	5.4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

## INSTALLATIONS

BURNERS	2
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100) / 90
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	137
COMPRESSOR FRIDGE (L)	-
STANDARD HEATING SYSTEM	Truma Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	-
SHOWER TRAY WITH DOUBLE DRAIN	-
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S

## SKYLIGHT

PANORAMIC ROOF (MM)	PACK HORON FIT (1000x800)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
OBLÒ DINETTE (MM)	S (700x500) / - with elevating bed
CENTRAL SKYLIGHT (MM)	S (400x400) / - with elevating bed
SKYLIGHT SHOWER (MM)	28x28
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

## EQUIPMENTS

PLEATED CAB BLIND	PACK HORON FIT
REAR-VIEW CAMERA	S
SOLAR PANEL	PACK HORON FIT
AWINING	PACK OPEN AIR
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood



www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# HORON FIT

## Pack


OPEN AIR PACK	<p>T5200 ANTHRACITE AWNING          3 METRES: ON HORON FIT 91          3.5 METRES: ON HORON FIT 30 AND 81          EXTERNAL GAS OUTLET + SHOWER IN GARAGE          GLOVE BOX WITH LOCK          "TREND" INTERIORS AND INSTRUMENT PANEL          BUMPERS AND SIDE MOULDINGS IN MATCHING BODY COLOUR          XL 2-POINT DOOR LOCK WITH WINDOW AND CENTRAL LOCKING SYSTEM          CP-PLUS          SKYROOF          SINK COVER          CAB SEAT COVERS MATCHING THE UPHOLSTERY          200 W SOLAR PANEL WITH NEW MPPT CONTROLLER          PLEATED BLIND</p>
EXTRA ASSISTANCE PACK	<p>ELECTRIC WINDSCREEN DEFROSTER          ADAPTIVE CRUISE CONTROL WITH LANE CENTRING AND STOP&amp;GO          PRE-COLLISION ASSIST 2.2          SPEED SIGN RECOGNITION #3, INTEGRATED CON ADAPTIVE CRUISE CONTROL          POWER-FOLDING MIRRORS WITH ELECTRIC DEFROSTER          NAVIGATION CENTRE</p>
SELEKT FORD PACK	<p>AUTOMATIC TRANSMISSION          (CHANGED TO 165 HP ENGINE - HEAVY DUTY)          SELEKT GRAPHICS</p>
DESIGN PACK	<p>CAB WITH MOONDUST SILVER METALLIC PAINT          "16" BLACK ALLOY WHEELS</p>
TV WI-FI PACK	<p>WIFI ROUTER          TV ARM          24" SMART TV</p>
TV DIGIT PACK	<p>DIGITAL AERIAL          TV ARM          24" SMART TV</p>
TV SAT PACK	<p>SATELLITE AERIAL          TV ARM          24" SMART TV</p>




# HORON 77 M



Over Cab

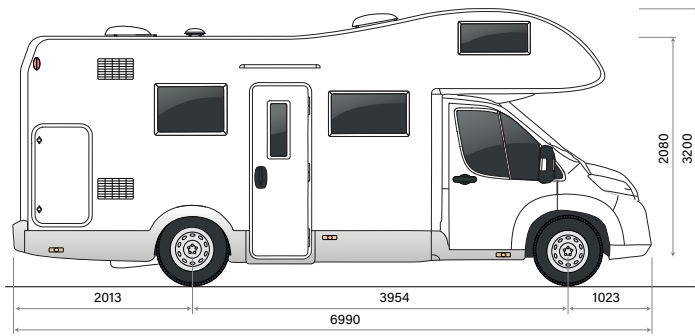

2350 ← 6990

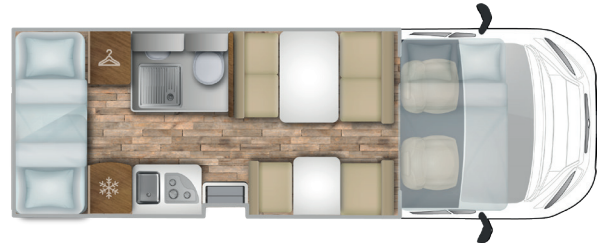

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2865
PAY LOAD MIN/MAX (KG)	635
WHEELBASE (MM)	3954
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	-
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE	S
REAR BED (CM)	215 x 80 - 215 x 80
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	186 x 125 - 163 x 65
OVERCAB BED (CM)	209 x 160
ADDITIONAL SEAT REAR BED	-
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	- / -
LOCKER (USEFUL OPENING, CM)	105 x 58 / 105 x 58
MAX. INTERNAL GARAGE HEIGHT (CM)	120
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

## INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100) / 120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	135
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S

## SKYLIGHT

PANORAMIC ROOF (MM)	O (800x600)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
DINETTE SKYLIGHT (MM)	S (400x400)
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

## EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	-
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.


# HORON 79 M



Over Cab

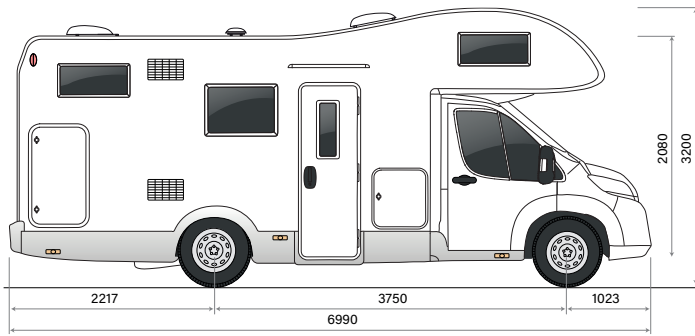

2350 ← 6990

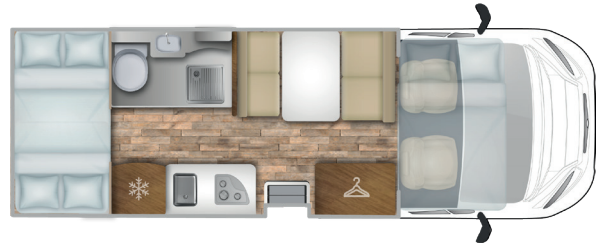

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2835
PAY LOAD MIN/MAX (KG)	665
WHEELBASE (MM)	3750
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	-
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE	S
REAR BED (CM)	216 x 130(110) - 216 x 127(110)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	186 x 125
OVERCAB BED (CM)	210 x 160
ADDITIONAL SEAT REAR BED	-
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	- / -
LOCKER (USEFUL OPENING, CM)	128 x 100(72) - 128 x 100(72)
MAX. INTERNAL GARAGE HEIGHT (CM)	135
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

## INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100)/120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	135
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S

## SKYLIGHT

PANORAMIC ROOF (MM)	O (800x600)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
DINETTE SKYLIGHT (MM)	S (400x400)
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

## EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood



www.caravansinternational.it


The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.



# HORON 84 M



Over Cab

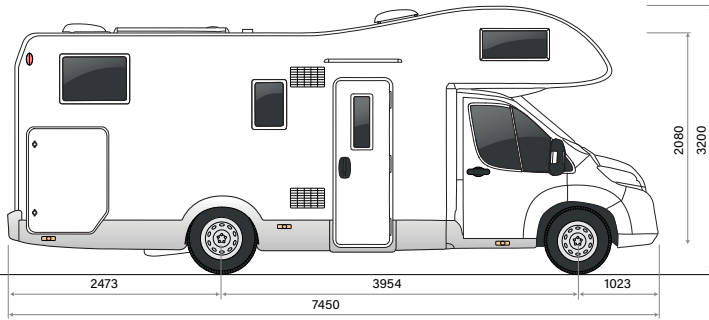

2350 ← 7450



## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2855
PAY LOAD MIN/MAX (KG)	645
WHEELBASE (MM)	3954
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE	S
REAR BED (CM)	197 x 80 - 208 x 80
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216 x 58
OVERCAB BED (CM)	209 x 160
ADDITIONAL SEAT REAR BED	S
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	- / -
LOCKER (USEFUL OPENING, CM)	115 x 85 (72) / 115 x 85 (72)
MAX. INTERNAL GARAGE HEIGHT (CM)	120
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

## INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100)/120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	135
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S

## SKYLIGHT

PANORAMIC ROOF (MM)	O (800x600)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
DINETTE SKYLIGHT (MM)	S (400x400)
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

## EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# HORON 90 M



Over Cab

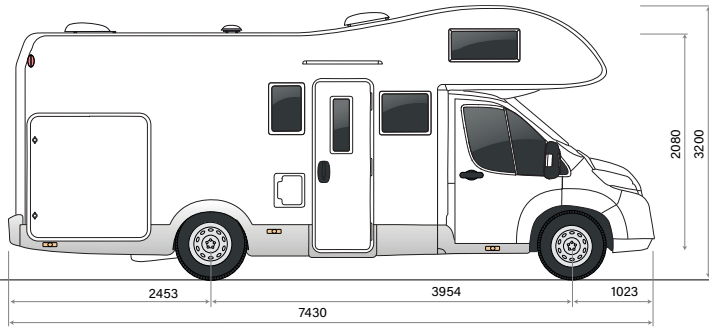

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2905
PAY LOAD MIN/MAX (KG)	595
WHEELBASE (MM)	3954
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE	S
REAR BED (CM)	215 x 183
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	212 x 113(50)
OVERCAB BED (CM)	209 x 160
ADDITIONAL SEAT REAR BED	-
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	S / -
LOCKER (USEFUL OPENING, CM)	130 x 135 - 130 x 135
MAX. INTERNAL GARAGE HEIGHT (CM)	143
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

## INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100)/120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	135
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S

## SKYLIGHT

PANORAMIC ROOF (MM)	O (800x600)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
DINETTE SKYLIGHT (MM)	S (400x400)
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

## EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood



www.caravansinternational.it


The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.



# HORON 34 XT



Low-profile

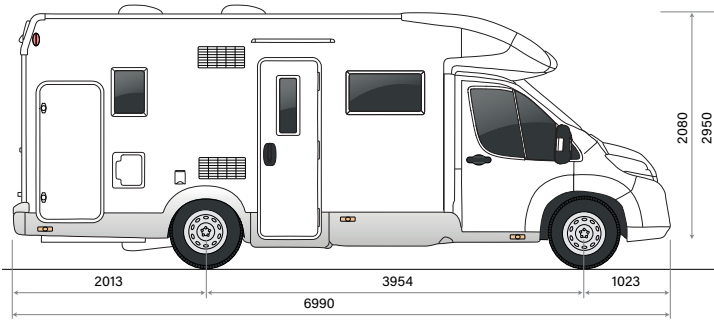

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2875
PAY LOAD (KG)	625
WHEELBASE (MM)	3954
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE	S
REAR BED (CM)	-
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216 x 126
ELEVATING BED (CM)	190 x 160
ADDITIONAL SEAT REAR BED	-
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	-
LOCKER (USEFUL OPENING, CM)	145 x 70(54) / 130 x 34
MAX. INTERNAL GARAGE HEIGHT (CM)	104(227)
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

## INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(120) / 120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	145
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S

## SKYLIGHT

PANORAMIC ROOF (MM)	S (1000x800)
REAR SKYLIGHT (MM)	S (400x400)
CENTRAL SKYLIGHT (MM)	S (400x400) / O (700x500)
DINETTE SKYLIGHT (MM)	-
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

## EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	-
INTERNAL LED LIGHTENING	S

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.




www.caravansinternational.it

# HORON 65 XT



Low-profile

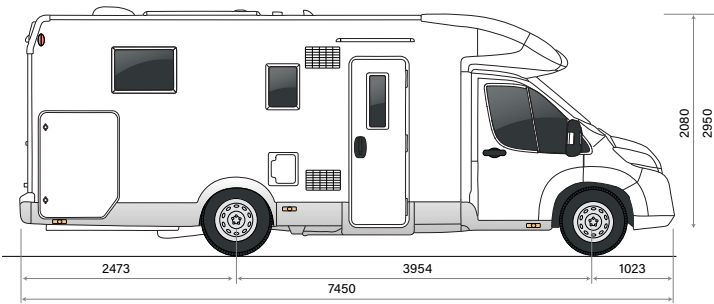

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2905
PAY LOAD (KG)	595
WHEELBASE (MM)	3954
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	S / S / -
<b>DIMENSIONS AND PLACES</b>	
AUXILIARY BED IN DINETTE	S
REAR BED (CM)	190 x 150
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216 x 58
ELEVATING BED (CM)	190 x 128 (107)
ADDITIONAL SEAT REAR BED	-
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	S / -
LOCKER (USEFUL OPENING, CM)	115 x 85 (72) / 115 x 85 (72)
MAX. INTERNAL GARAGE HEIGHT (CM)	120
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S
<b>INSTALLATIONS</b>	
BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100) / 120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	120
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
<b>SKYLIGHT</b>	
PANORAMIC ROOF (MM)	S (1000x800)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
CENTRAL SKYLIGHT (MM)	S (400x400)
DINETTE SKYLIGHT (MM)	-
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S
<b>EQUIPMENTS</b>	
THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S
<b>EXTERIORS</b>	
ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# HORON 74 XT



Low-profile

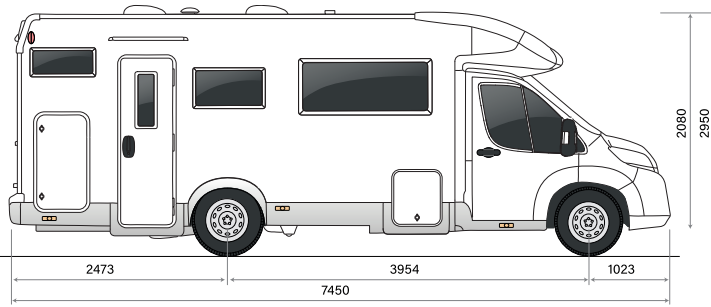

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2915
PAY LOAD (KG)	585
WHEELBASE (MM)	3954
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay
<b>DIMENSIONS AND PLACES</b>	
AUXILIARY BED IN DINETTE	S
REAR BED (CM)	216 x 100(84) - 216 x 100(84)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	178 x 70 - 200 x 66
ELEVATING BED (CM)	190 x 160
ADDITIONAL SEAT REAR BED	-
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	- / -
LOCKER (USEFUL OPENING, CM)	105 x 58 / 105 x 58
MAX. INTERNAL GARAGE HEIGHT (CM)	142
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S
<b>INSTALLATIONS</b>	
BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(120) / 120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	135
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
<b>SKYLIGHT</b>	
PANORAMIC ROOF (MM)	S (1000x800)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
CENTRAL SKYLIGHT (MM)	S (400x400)
DINETTE SKYLIGHT (MM)	-
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S
<b>EQUIPMENTS</b>	
THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S
<b>EXTERIORS</b>	
ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.





www.caravansinternational.it

# HORON 84 XT



Low-profile

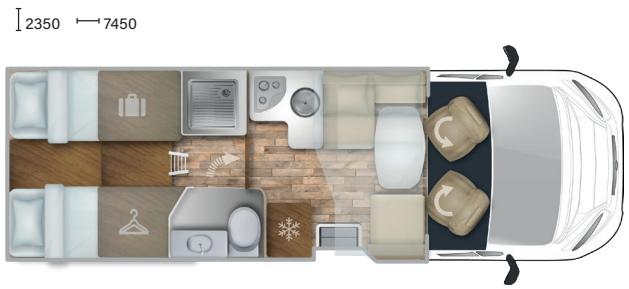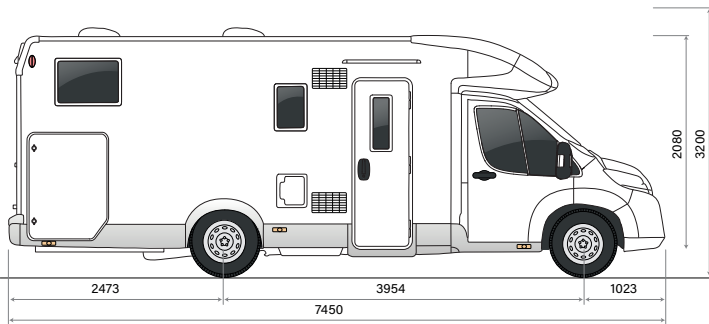

## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2905
PAY LOAD (KG)	595
WHEELBASE (MM)	3954
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay
<b>DIMENSIONS AND PLACES</b>	
AUXILIARY BED IN DINETTE	S
REAR BED (CM)	197 x 80 - 208 x 80
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216 x 58
ELEVATING BED (CM)	190 x 128(107)
ADDITIONAL SEAT REAR BED	S
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	- / -
LOCKER (USEFUL OPENING, CM)	115 x 85(72) / 115 x 85(72)
MAX. INTERNAL GARAGE HEIGHT (CM)	120
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S
<b>INSTALLATIONS</b>	
BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100) / 120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	135
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
<b>SKYLIGHT</b>	
PANORAMIC ROOF (MM)	S (1000x800)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
CENTRAL SKYLIGHT (MM)	S (400x400)
DINETTE SKYLIGHT (MM)	-
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S
<b>EQUIPMENTS</b>	
THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S
<b>EXTERIORS</b>	
ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.




www.caravansinternational.it

# HORON 85 XT



Low-profile

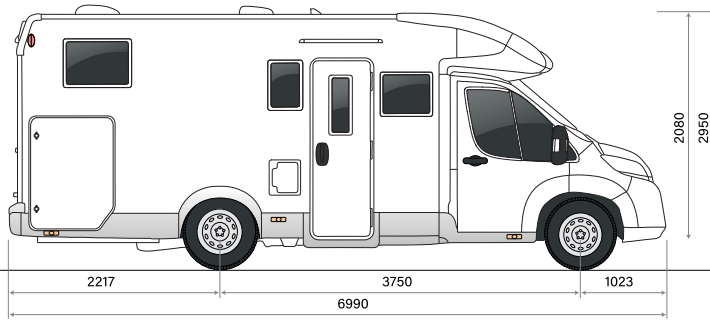

2350 ← 6990



## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2865
PAY LOAD (KG)	635
WHEELBASE (MM)	3750
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE	S
REAR BED (CM)	195 x 80 - 192 x 80
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216 x 67
ELEVATING BED (CM)	190 x 128(107)
ADDITIONAL SEAT REAR BED	S
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	- / -
LOCKER (USEFUL OPENING, CM)	115 x 85(72) / 115 x 85(72)
MAX. INTERNAL GARAGE HEIGHT (CM)	120
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

## INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100) / 120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	135
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	-
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S

## SKYLIGHT

PANORAMIC ROOF (MM)	S (1000x800)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
CENTRAL SKYLIGHT (MM)	S (400x400)
DINETTE SKYLIGHT (MM)	-
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

## EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.




www.caravansinternational.it

# HORON 95 XT



Low-profile

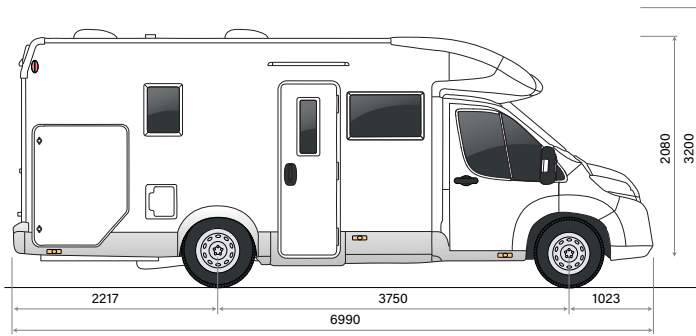

2350 ← 6990



## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2845
PAY LOAD (KG)	655
WHEELBASE (MM)	3750
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay
<b>DIMENSIONS AND PLACES</b>	
AUXILIARY BED IN DINETTE	S
REAR BED (CM)	207 x 135(120)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216 x 90(50)
ELEVATING BED (CM)	190 x 128(107)
ADDITIONAL SEAT REAR BED	-
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	- / S
LOCKER (USEFUL OPENING, CM)	128 x 100(72) / 128 x 100(72)
MAX. INTERNAL GARAGE HEIGHT (CM)	135
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S
<b>INSTALLATIONS</b>	
BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100) / 120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	135
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
<b>SKYLIGHT</b>	
PANORAMIC ROOF (MM)	S (1000x800)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
CENTRAL SKYLIGHT (MM)	S (400x400)
DINETTE SKYLIGHT (MM)	-
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S
<b>EQUIPMENTS</b>	
THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S
<b>EXTERIORS</b>	
ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.




www.caravansinternational.it



# HORON 98 XT



Low-profile

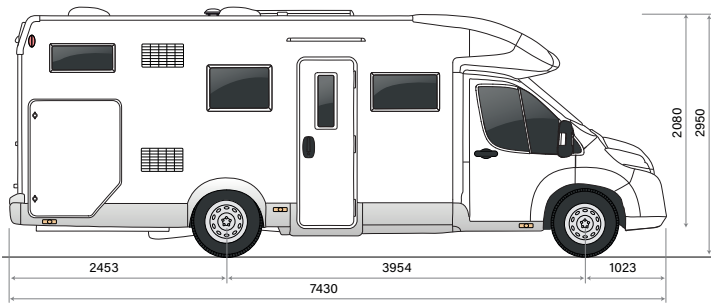

2350 ← 7430



## MECHANICS AND CHASSIS

MECHANICAL UNIT	Ford Transit
ENGINE, POWER HP	2.0 TDCi Ford EcoBlue 130CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2835
PAY LOAD (KG)	665
WHEELBASE (MM)	3954
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16" steel
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC / TRACTION +	S / S / -
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
INFOTAINMENT	Radio Dab touch 12" Android Auto / Apple Carplay
<b>DIMENSIONS AND PLACES</b>	
AUXILIARY BED IN DINETTE	S
REAR BED (CM)	207 x 129
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216 x 90(104)
ELEVATING BED (CM)	190 x 133(124)
ADDITIONAL SEAT REAR BED	-
FLEX SPACE (REAR BED HEIGHT ADJUSTMENT) ELECTRIC / MANUAL	- / S
LOCKER (USEFUL OPENING, CM)	128 x 100(72) / 128x100(72)
MAX. INTERNAL GARAGE HEIGHT (CM)	135
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S
<b>INSTALLATIONS</b>	
BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER	20(100) / 120
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	145
STANDARD HEATING SYSTEM	Truma Combi Gas 4 kW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
<b>SKYLIGHT</b>	
PANORAMIC ROOF (MM)	S (1000x800)
REAR SKYLIGHT (MM)	S (400x400) / O (700x500)
CENTRAL SKYLIGHT (MM)	S (400x400)
DINETTE SKYLIGHT (MM)	-
SKYLIGHT SHOWER (MM)	S
400X400 SKYLIGHT (MM) WITH FAN	O
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S
<b>EQUIPMENTS</b>	
THERMAL BLIND	S
BEDS WITH STAVES	S
INTERNAL LED LIGHTENING	S
<b>EXTERIORS</b>	
ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.



www.caravansinternational.it

# HORON

## Pack

HORON FORD PACK **	<p>MANUAL TRANSMISSION            (165 HP WITH AUTOMATIC TRANSMISSION - LIGHT DUTY)            HIGH SERIES HEADLIGHTS WITH STATIC CORNERING LIGHTS            GLOVE BOX WITH LOCK            "TREND" INTERIORS AND INSTRUMENT PANEL            BUMPERS AND SIDE MOULDINGS IN MATCHING BODY COLOUR            XL 2-POINT DOOR LOCK WITH WINDOW AND CENTRAL LOCKING SYSTEM            200 W SOLAR PANEL WITH NEW MPPT CONTROLLER            PLEATED BLIND</p>
PACK DESIGN FORD	<p>MOONDUST SILVER CAB            16" BLACK ALLOY WHEELS</p>
EXTRA ASSISTANCE PACK	<p>ELECTRIC WINDSCREEN DEFROSTER            ADAPTIVE CRUISE CONTROL WITH LANE CENTRING AND STOP&amp;GO            PRE-COLLISION ASSIST 2.2            SPEED SIGN RECOGNITION #3, INTEGRATED CON ADAPTIVE CRUISE CONTROL            POWER-FOLDING MIRRORS WITH ELECTRIC DEFROSTER            NAVIGATION CENTRE</p>
SELEKT FORD PACK	<p>AUTOMATIC TRANSMISSION            (CHANGED TO 165 HP ENGINE WITH AUTOMATIC TRANSMISSION - HEAVY DUTY)            SELEKT GRAPHICS</p>
TV DIGIT PACK	<p>DIGITAL AERIAL            24" TV ARM            24" SMART TV</p>
WINTER PACK	<p>STEP INSULATION            EXTERIOR PIPES HEATING SOCK            INSULATED GREY WATER TANK</p>
TV WI-FI PACK	<p>WIFI ROUTER            24" TV ARM            24" SMART TV</p>
TV SAT PACK	<p>SATELLITE AERIAL            24" TV ARM            24" SMART TV</p>

N.B. Selekt Pack needed to have the Design Ford Pack




[www.caravansinternational.it](http://www.caravansinternational.it)

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# MAGIS 66 XT



Low-profile

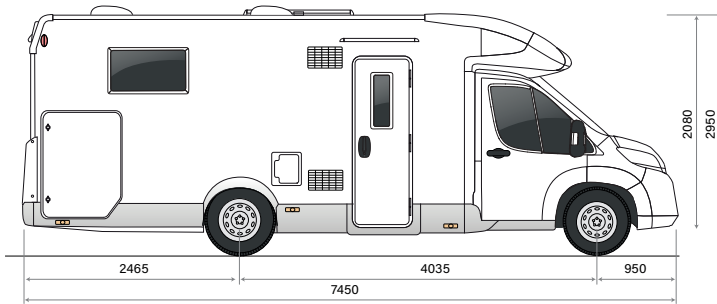

2350 → 7450



## MECHANICS AND CHASSIS

MECHANICAL UNIT
ENGINE, POWER HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)
PAY LOAD (KG)
WHEELBASE (MM)
MAXIMUM TOWABLE WEIGHT (KG)
WHEELS DIMENSIONS
MANUAL AIR CONDITIONING
DRIVER AND PASSENGER AIRBAG
CRUISE CONTROL WITH SPEED LIMITER
ABS / ESC / TRACTION+
DRIVER AND PASSENGER SWIVELLING SEATS
CAB SEAT COVERS
PAINTED FRONT BUMPER
FOG LIGHTS

## INFOTAINMENT

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE
REAR BED (CM)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)
ELEVATING BED (CM)
ADDITIONAL SEAT REAR BED
LOCKER (USEFUL OPENING, CM)
MAX. INTERNAL GARAGE HEIGHT (CM)
FLOOR / WALLS / ROOF THICKNESS (CM)
FLOOR / WALLS / ROOF MATERIAL
FIBERGLASS ROOF, HAIL-PROOF

## INSTALLATIONS

BURNERS
TANK CAPACITY : CLEAR WATER / WASTEWATER
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)
COMPRESSOR FRIDGE (L)
STANDARD HEATING SYSTEM
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)
SHOWER TRAY WITH DOUBLE DRAIN
INTEGRATED ENTRY STEP
HEATED GARAGE LOCKER

## SKYLIGHT

PANORAMIC ROOF (MM)
REAR SKYLIGHT (MM)
OBLÒ DINETTE (MM)
CENTRAL SKYLIGHT (MM)
SKYLIGHT SHOWER (MM)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

## EQUIPMENTS

PLEATED CAB BLIND
REAR-VIEW CAMERA
SOLAR PANEL
AWINING
BEDS WITH STAVES
INTERNAL LED LIGHTENING

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS
FLYSCREEN FOR ENTRANCE DOOR
XL ENTRANCE DOOR
EXTERNAL LED LIGHT



Ford Transit	Fiat Ducato
2.0 TDCi EcoBlue 130CV	2.2 MJ 140 CV
3500	3500
2865	2940
575	560
3954	4035
2000	2000
16" steel	15" steel
S	PACK EXTRA TECH
S	S
S + Intelligent Speed Assist	S
S / S / -	S / S / S
S	S
-	-
PACK MAGIS	PACK MAGIS
S	PACK MAGIS
Radio Dab touch 12"	Radio Dab touch 9"
Android Auto / Apple Carplay	Android Auto / Apple Carplay

O
190x150
O 216x100
203x135(114)
-
120x90 - 120x90
117
5,4 / 3 / 3
MTS / VTR / VTR
S

2
20(120) / 90
-
158
Truma Combi Gas 6 kW
S
-
-
S
S

S (1000x800)
S (400x400) / O (700x500)
-
S (400x400)
28x28
S

PACK MAGIS
S
PACK MAGIS
PACK MAGIS
S
S

PACK MAGIS (XL)
PACK MAGIS (XL)
S
S
S

S= standard O=optional - = not available VTR= Fibreglas MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# MAGIS 67 XT



Low-profile

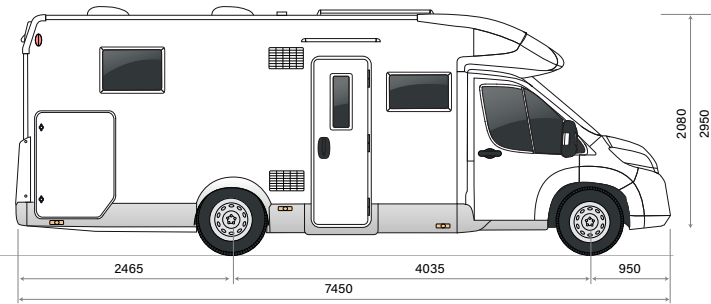

2350 → 7450



## MECHANICS AND CHASSIS

MECHANICAL UNIT
ENGINE, POWER HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)
PAY LOAD (KG)
WHEELBASE (MM)
MAXIMUM TOWABLE WEIGHT (KG)
WHEELS DIMENSIONS
MANUAL AIR CONDITIONING
DRIVER AND PASSENGER AIRBAG
CRUISE CONTROL WITH SPEED LIMITER
ABS / ESC / TRACTION+
DRIVER AND PASSENGER SWIVELLING SEATS
CAB SEAT COVERS
PAINTED FRONT BUMPER
FOG LIGHTS

## INFOTAINMENT

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE
REAR BED (CM)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)
ELEVATING BED (CM)
ADDITIONAL SEAT REAR BED
LOCKER (USEFUL OPENING, CM)
MAX. INTERNAL GARAGE HEIGHT (CM)
FLOOR / WALLS / ROOF THICKNESS (CM)
FLOOR / WALLS / ROOF MATERIAL
FIBERGLASS ROOF, HAIL-PROOF

## INSTALLATIONS

BURNERS
TANK CAPACITY : CLEAR WATER / WASTEWATER
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)
COMPRESSOR FRIDGE (L)
STANDARD HEATING SYSTEM
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)
SHOWER TRAY WITH DOUBLE DRAIN
INTEGRATED ENTRY STEP
HEATED GARAGE LOCKER

## SKYLIGHT

PANORAMIC ROOF (MM)
REAR SKYLIGHT (MM)
OBLÒ DINETTE (MM)
CENTRAL SKYLIGHT (MM)
SKYLIGHT SHOWER (MM)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

## EQUIPMENTS

PLEATED CAB BLIND
REAR-VIEW CAMERA
SOLAR PANEL
AWINING
BEDS WITH STAVES
INTERNAL LED LIGHTENING

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS
FLYSCREEN FOR ENTRANCE DOOR
XL ENTRANCE DOOR
EXTERNAL LED LIGHT



Ford Transit	Fiat Ducato
2.0 TDCi EcoBlue 130CV	2.2 MJ 140 CV
3500	3500
2895	2910
605	590
3954	4035
2000	2000
16" steel	15" steel
S	PACK EXTRA TECH
S	S
S + Intelligent Speed Assist	S
S / S / -	S / S / S
S	S
-	-
PACK MAGIS	PACK MAGIS
S	PACK MAGIS
Radio Dab touch 12"	Radio Dab touch 9"
Android Auto / Apple Carplay	Android Auto / Apple Carplay

O
190x150
O 216x80
203 x 135(114)
-
120x90 - 120x90
117
5,4 / 3 / 3
MTS / VTR / VTR
S

2
20(120) / 90
O
158
Truma Combi Gas 6 kW
S
-
-
S
S

S (1000x800)
S (400x400) / O (700x500)
-
S (400x400)
28x28
S

PACK MAGIS
S
PACK MAGIS
PACK MAGIS
-
S

PACK MAGIS (XL)
PACK MAGIS (XL)
S
S
S

S= standard O=optional - = not available VTR= Fiberglass MTS= multi-layered plywood



www.caravansinternational.it


The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# MAGIS 82 XT

WINTER SPECIAL



Low-profile

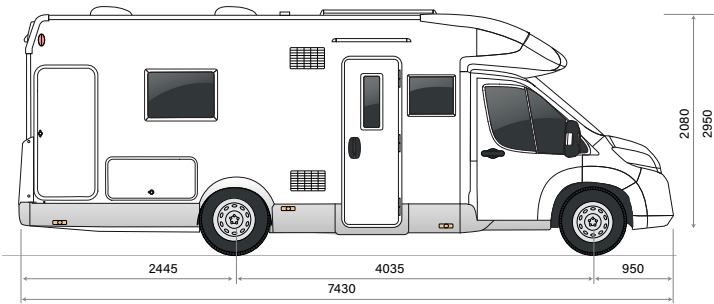

2350 ← 7430



## MECHANICS AND CHASSIS

MECHANICAL UNIT
ENGINE, POWER HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)
PAY LOAD (KG)
WHEELBASE (MM)
MAXIMUM TOWABLE WEIGHT (KG)
WHEELS DIMENSIONS
MANUAL AIR CONDITIONING
DRIVER AND PASSENGER AIRBAG
CRUISE CONTROL WITH SPEED LIMITER
ABS / ESC / TRACTION+
DRIVER AND PASSENGER SWIVELLING SEATS
CAB SEAT COVERS
PAINTED FRONT BUMPER
FOG LIGHTS

## INFOTAINMENT

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE
REAR BED (CM)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)
ELEVATING BED (CM)
ADDITIONAL SEAT REAR BED
LOCKER (USEFUL OPENING, CM)
MAX. INTERNAL GARAGE HEIGHT (CM)
FLOOR / WALLS / ROOF THICKNESS (CM)
FLOOR / WALLS / ROOF MATERIAL
FIBERGLASS ROOF, HAIL-PROOF

## INSTALLATIONS

BURNERS
TANK CAPACITY : CLEAR WATER / WASTEWATER
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)
COMPRESSOR FRIDGE (L)
STANDARD HEATING SYSTEM
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)
SHOWER TRAY WITH DOUBLE DRAIN
INTEGRATED ENTRY STEP
HEATED GARAGE LOCKER

## SKYLIGHT

PANORAMIC ROOF (MM)
REAR SKYLIGHT (MM)
OBLÒ DINETTE (MM)
CENTRAL SKYLIGHT (MM)
SKYLIGHT SHOWER (MM)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

## EQUIPMENTS

PLEATED CAB BLIND
REAR-VIEW CAMERA
SOLAR PANEL
AWINING
BEDS WITH STAVES
INTERNAL LED LIGHTENING

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS
FLYSCREEN FOR ENTRANCE DOOR
XL ENTRANCE DOOR
EXTERNAL LED LIGHT



Ford Transit	Fiat Ducato
2.0 TDCi EcoBlue 130CV	2.2 MJ 140 CV
3500	3500
2935	2950
565	550
3954	4035
2000	2000
16" steel	15" steel
S	PACK EXTRA TECH
S	S
S + Intelligent Speed Assist	S
S / S / -	S / S / S
S	S
-	-
PACK MAGIS	PACK MAGIS
S	PACK MAGIS
Radio Dab touch 12"	Radio Dab touch 9"
Android Auto / Apple Carplay	Android Auto / Apple Carplay

S
200x80 - 200x80
213x65
203 x 135(114)
-
145x65 - 40x95 - 40x95
204
5,4 / 3 / 3
MTS / VTR / VTR
S

2
20(100) / 85
O
158
ALDE 6000 W a circolazione d'acqua
S
-
-
S (coibentato)
S

S (1000x800)
S (400x400) / O (700x500)
-
S (400x400)
28x28
S

PACK MAGIS
S
PACK MAGIS
PACK MAGIS
-
S

PACK MAGIS (XL)
PACK MAGIS (XL)
S
S
S

S= standard O=optional - = not available VTR= Fibreglas MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# MAGIS 85 XT



Low-profile

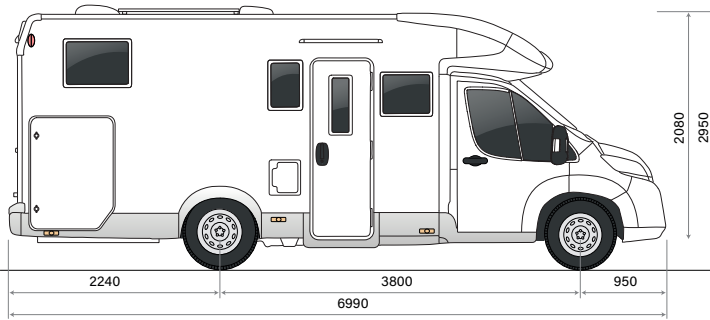

2350 — 6990



## MECHANICS AND CHASSIS

MECHANICAL UNIT
ENGINE, POWER HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)
PAY LOAD (KG)
WHEELBASE (MM)
MAXIMUM TOWABLE WEIGHT (KG)
WHEELS DIMENSIONS
MANUAL AIR CONDITIONING
DRIVER AND PASSENGER AIRBAG
CRUISE CONTROL WITH SPEED LIMITER
ABS / ESC / TRACTION+
DRIVER AND PASSENGER SWIVELLING SEATS
CAB SEAT COVERS
PAINTED FRONT BUMPER
FOG LIGHTS

## INFOTAINMENT

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE
REAR BED (CM)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)
ELEVATING BED (CM)
ADDITIONAL SEAT REAR BED
LOCKER (USEFUL OPENING, CM)
MAX. INTERNAL GARAGE HEIGHT (CM)
FLOOR / WALLS / ROOF THICKNESS (CM)
FLOOR / WALLS / ROOF MATERIAL
FIBERGLASS ROOF, HAIL-PROOF

## INSTALLATIONS

BURNERS
TANK CAPACITY : CLEAR WATER / WASTEWATER
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)
COMPRESSOR FRIDGE (L)
STANDARD HEATING SYSTEM
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)
SHOWER TRAY WITH DOUBLE DRAIN
INTEGRATED ENTRY STEP
HEATED GARAGE LOCKER

## SKYLIGHT

PANORAMIC ROOF (MM)
REAR SKYLIGHT (MM)
OBLÒ DINETTE (MM)
CENTRAL SKYLIGHT (MM)
SKYLIGHT SHOWER (MM)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

## EQUIPMENTS

PLEATED CAB BLIND
REAR-VIEW CAMERA
SOLAR PANEL
AWINING
BEDS WITH STAVES
INTERNAL LED LIGHTENING

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS
FLYSCREEN FOR ENTRANCE DOOR
XL ENTRANCE DOOR
EXTERNAL LED LIGHT

Ford Transit	Fiat Ducato
2.0 TDCi EcoBlue 130CV	2.2 MJ 140 CV
3500	3500
2865	2880
635	620
3750	3800
2000	2000
16" steel	15" steel
S	PACK EXTRA TECH
S	S
S + Intelligent Speed Assist	S
S / S / -	S / S / S
S	S
-	-
PACK MAGIS	PACK MAGIS
S	PACK MAGIS
Radio Dab touch 12"	Radio Dab touch 9"
Android Auto / Apple Carplay	Android Auto / Apple Carplay

S
200x81 - 199x81 - 165x215
216x85(65)
203x135(114)
S
120x90 - 120x90
121
5,4 / 3 / 3
MTS / VTR / VTR
S

2
20(100) / 90
-
158
Truma Combi Gas 6 kW
S
-
-
S
S

S (1000x800)
S (400x400) / O (700x500)
-
S (400x400)
28x28
S

PACK MAGIS
S
PACK MAGIS
PACK MAGIS
S
S

PACK MAGIS (XL)
PACK MAGIS (XL)
S
S
S

S= standard O=optional - = not available VTR= Fiberglass MTS= multi-layered plywood



www.caravansinternational.it


The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.



# MAGIS 87 XT



Low-profile

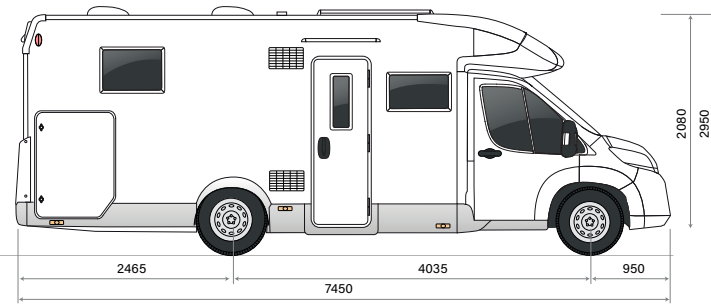

## MECHANICS AND CHASSIS

MECHANICAL UNIT
ENGINE, POWER HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)
PAY LOAD (KG)
WHEELBASE (MM)
MAXIMUM TOWABLE WEIGHT (KG)
WHEELS DIMENSIONS
MANUAL AIR CONDITIONING
DRIVER AND PASSENGER AIRBAG
CRUISE CONTROL WITH SPEED LIMITER
ABS / ESC / TRACTION+
DRIVER AND PASSENGER SWIVELLING SEATS
CAB SEAT COVERS
PAINTED FRONT BUMPER
FOG LIGHTS

## INFOTAINMENT

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE
REAR BED (CM)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)
ELEVATING BED (CM)
ADDITIONAL SEAT REAR BED
LOCKER (USEFUL OPENING, CM)
MAX. INTERNAL GARAGE HEIGHT (CM)
FLOOR / WALLS / ROOF THICKNESS (CM)
FLOOR / WALLS / ROOF MATERIAL
FIBERGLASS ROOF, HAIL-PROOF

## INSTALLATIONS

BURNERS
TANK CAPACITY : CLEAR WATER / WASTEWATER
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)
COMPRESSOR FRIDGE (L)
STANDARD HEATING SYSTEM
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)
SHOWER TRAY WITH DOUBLE DRAIN
INTEGRATED ENTRY STEP
HEATED GARAGE LOCKER

## SKYLIGHT

PANORAMIC ROOF (MM)
REAR SKYLIGHT (MM)
OBLÒ DINETTE (MM)
CENTRAL SKYLIGHT (MM)
SKYLIGHT SHOWER (MM)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

## EQUIPMENTS

PLEATED CAB BLIND
REAR-VIEW CAMERA
SOLAR PANEL
AWINING
BEDS WITH STAVES
INTERNAL LED LIGHTENING

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS
FLYSCREEN FOR ENTRANCE DOOR
XL ENTRANCE DOOR
EXTERNAL LED LIGHT



Ford Transit	Fiat Ducato
2.0 TDCi EcoBlue 130CV	2.2 MJ 140 CV
3500	3500
2895	2910
605	590
3954	4035
2000	2000
16" steel	15" steel
S	PACK EXTRA TECH
S	S
S + Intelligent Speed Assist	S
S / S / -	S / S / S
S	S
-	-
PACK MAGIS	PACK MAGIS
S	PACK MAGIS
Radio Dab touch 12"	Radio Dab touch 9"
Android Auto / Apple Carplay	Android Auto / Apple Carplay

O
200x81 - 203x81 - 171x215
O 216x98(77)
203 x 135(114)
S
120x90 - 120x90
121
5,4 / 3 / 3
MTS / VTR / VTR
S

2
20(120) / 90
O
158
Truma Combi Gas 6 kW
S
-
-
S
S

S (1000x800)
S (400x400) / O (700x500)
-
S (400x400)
28x28
S

PACK MAGIS
S
PACK MAGIS
PACK MAGIS
-
S

PACK MAGIS (XL)
PACK MAGIS (XL)
S
S
S

S= standard O=optional - = not available VTR= Fibreglas MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# MAGIS 95 XT



Low-profile

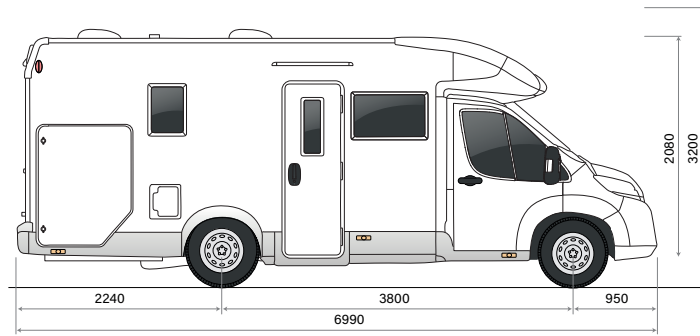

2350 → 6990



## MECHANICS AND CHASSIS

MECHANICAL UNIT
ENGINE, POWER HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)
PAY LOAD (KG)
WHEELBASE (MM)
MAXIMUM TOWABLE WEIGHT (KG)
WHEELS DIMENSIONS
MANUAL AIR CONDITIONING
DRIVER AND PASSENGER AIRBAG
CRUISE CONTROL WITH SPEED LIMITER
ABS / ESC / TRACTION+
DRIVER AND PASSENGER SWIVELLING SEATS
CAB SEAT COVERS
PAINTED FRONT BUMPER
FOG LIGHTS

## INFOTAINMENT

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE
REAR BED (CM)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)
ELEVATING BED (CM)
ADDITIONAL SEAT REAR BED
LOCKER (USEFUL OPENING, CM)
MAX. INTERNAL GARAGE HEIGHT (CM)
FLOOR / WALLS / ROOF THICKNESS (CM)
FLOOR / WALLS / ROOF MATERIAL
FIBERGLASS ROOF, HAIL-PROOF

## INSTALLATIONS

BURNERS
TANK CAPACITY : CLEAR WATER / WASTEWATER
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)
COMPRESSOR FRIDGE (L)
STANDARD HEATING SYSTEM
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)
SHOWER TRAY WITH DOUBLE DRAIN
INTEGRATED ENTRY STEP
HEATED GARAGE LOCKER

## SKYLIGHT

PANORAMIC ROOF (MM)
REAR SKYLIGHT (MM)
OBLÒ DINETTE (MM)
CENTRAL SKYLIGHT (MM)
SKYLIGHT SHOWER (MM)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

## EQUIPMENTS

PLEATED CAB BLIND
REAR-VIEW CAMERA
SOLAR PANEL
AWINING
BEDS WITH STAVES
INTERNAL LED LIGHTENING

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS
FLYSCREEN FOR ENTRANCE DOOR
XL ENTRANCE DOOR
EXTERNAL LED LIGHT

Ford Transit	Fiat Ducato
2.0 TDCi EcoBlue 130CV	2.2 MJ 140 CV
3500	3500
2845	2860
655	640
3750	3800
2000	2000
16" steel	15" steel
S	PACK EXTRA TECH
S	S
S + Intelligent Speed Assist	S
S / S / -	S / S / S
S	S
-	-
PACK MAGIS	PACK MAGIS
S	PACK MAGIS
Radio Dab touch 12"	Radio Dab touch 9"
Android Auto / Apple Carplay	Android Auto / Apple Carplay

S
207x137(122)
216x50
203x135(114)
-
120x90 - 120x90
125
5,4 / 3 / 3
MTS / VTR / VTR
S

2
20(100) / 90
-
158
Truma Combi Gas 6 kW
S
-
-
S
S

S (1000x800)
S (400x400) / O (700x500)
-
S (400x400)
28x28
S

PACK MAGIS
S
PACK MAGIS
PACK MAGIS
S
S

PACK MAGIS (XL)
PACK MAGIS (XL)
S
S
S

S= standard O=optional - = not available VTR= Fiberglass MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# MAGIS 67 INT



A-Class

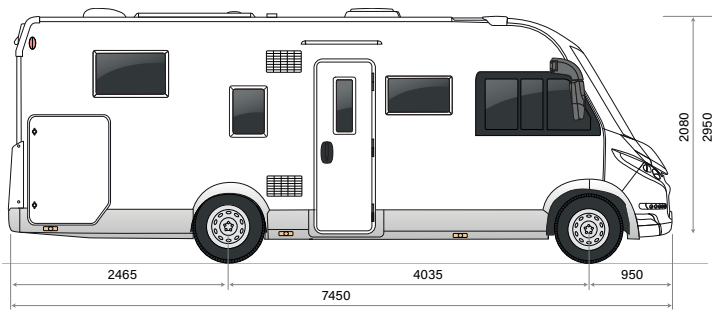

2350 ← 7450



## MECHANICS AND CHASSIS

MECHANICAL UNIT
ENGINE, POWER HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)
PAY LOAD (KG)
WHEELBASE (MM)
MAXIMUM TOWABLE WEIGHT (KG)
WHEELS DIMENSIONS
MANUAL AIR CONDITIONING
DRIVER AND PASSENGER AIRBAG
CRUISE CONTROL WITH SPEED LIMITER
ABS / ESC / TRACTION+
DRIVER AND PASSENGER SWIVELLING SEATS
CAB SEAT COVERS
PAINTED FRONT BUMPER
FOG LIGHTS

## INFOTAINMENT

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE
REAR BED (CM)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)
ELEVATING BED (CM)
ADDITIONAL SEAT REAR BED
LOCKER (USEFUL OPENING, CM)
MAX. INTERNAL GARAGE HEIGHT (CM)
FLOOR / WALLS / ROOF THICKNESS (CM)
FLOOR / WALLS / ROOF MATERIAL
FIBERGLASS ROOF, HAIL-PROOF

## INSTALLATIONS

BURNERS
TANK CAPACITY : CLEAR WATER / WASTEWATER
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)
COMPRESSOR FRIDGE (L)
STANDARD HEATING SYSTEM
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)
SHOWER TRAY WITH DOUBLE DRAIN
INTEGRATED ENTRY STEP
HEATED GARAGE LOCKER

## SKYLIGHT

PANORAMIC ROOF (MM)
REAR SKYLIGHT (MM)
OBLÒ DINETTE (MM)
CENTRAL SKYLIGHT (MM)
SKYLIGHT SHOWER (MM)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

## EQUIPMENTS

PLEATED CAB BLIND
REAR-VIEW CAMERA
SOLAR PANEL
AWINING
BEDS WITH STAVES
INTERNAL LED LIGHTENING

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS
FLYSCREEN FOR ENTRANCE DOOR
XL ENTRANCE DOOR
EXTERNAL LED LIGHT

FIAT

Fiat ducato
2.2 MJ 140 CV
3500
2900
600
4035
2000
15" steel steel
PACK EXTRA TECH
S
S
S / S / S
S
-
PACK MAGIS
PACK MAGIS
Radio Dab touch 9"
Android Auto / Apple Carplay

O
190x150
216x111(80)
190x145
S
120x90 - 120x90
117
5,4 / 3 / 3
MTS / VTR / VTR
S

2
20(120) / 90
-
158
Truma Combi Gas 6 kW
S
-
-
S
S

-
S (400x400) / O (700x500)
S (700x500)
-
28x28
S

PACK MAGIS
S
PACK MAGIS
PACK MAGIS
-
S

PACK MAGIS (XL)
PACK MAGIS (XL)
S
S
S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood




www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

# MAGIS 87 INT



A-Class

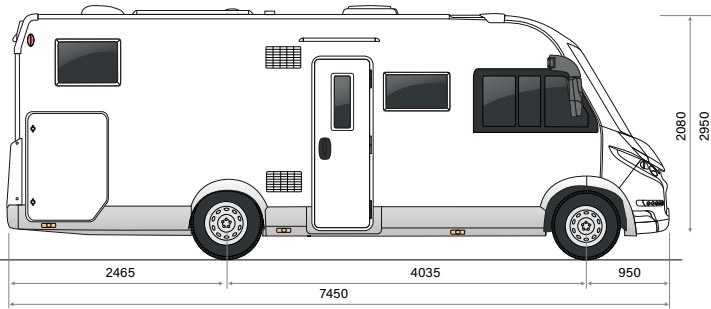

## MECHANICS AND CHASSIS

MECHANICAL UNIT
ENGINE, POWER HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)
PAY LOAD (KG)
WHEELBASE (MM)
MAXIMUM TOWABLE WEIGHT (KG)
WHEELS DIMENSIONS
MANUAL AIR CONDITIONING
DRIVER AND PASSENGER AIRBAG
CRUISE CONTROL WITH SPEED LIMITER
ABS / ESC / TRACTION+
DRIVER AND PASSENGER SWIVELLING SEATS
CAB SEAT COVERS
PAINTED FRONT BUMPER
FOG LIGHTS

## INFOTAINMENT

## DIMENSIONS AND PLACES

AUXILIARY BED IN DINETTE
REAR BED (CM)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)
ELEVATING BED (CM)
ADDITIONAL SEAT REAR BED
LOCKER (USEFUL OPENING, CM)
MAX. INTERNAL GARAGE HEIGHT (CM)
FLOOR / WALLS / ROOF THICKNESS (CM)
FLOOR / WALLS / ROOF MATERIAL
FIBERGLASS ROOF, HAIL-PROOF

## INSTALLATIONS

BURNERS
TANK CAPACITY : CLEAR WATER / WASTEWATER
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)
COMPRESSOR FRIDGE (L)
STANDARD HEATING SYSTEM
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)
SHOWER TRAY WITH DOUBLE DRAIN
INTEGRATED ENTRY STEP
HEATED GARAGE LOCKER

## SKYLIGHT

PANORAMIC ROOF (MM)
REAR SKYLIGHT (MM)
OBLÒ DINETTE (MM)
CENTRAL SKYLIGHT (MM)
SKYLIGHT SHOWER (MM)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

## EQUIPMENTS

PLEATED CAB BLIND
REAR-VIEW CAMERA
SOLAR PANEL
AWINING
BEDS WITH STAVES
INTERNAL LED LIGHTENING

## EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW
LIVING UNIT XL DOOR WITH 2 LOCKING POINTS
FLYSCREEN FOR ENTRANCE DOOR
XL ENTRANCE DOOR
EXTERNAL LED LIGHT

FIAT

Fiat ducato
2.2 MJ 140 CV
3500
2900
600
4035
2000
15" steel steel
PACK EXTRA TECH
S
S
S / S / S
S
-
PACK MAGIS
PACK MAGIS
Radio Dab touch 9"
Android Auto / Apple Carplay

O
190x150
216x111(80)
190x145
S
120x90 - 120x90
117
5,4 / 3 / 3
MTS / VTR / VTR
S

2
20(120) / 90
-
158
Truma Combi Gas 6 kW
S
-
-
S
S

-
S (400x400) / O (700x500)
S (700x500)
-
28x28
S

PACK MAGIS
S
PACK MAGIS
PACK MAGIS
-
S

PACK MAGIS (XL)
PACK MAGIS (XL)
S
S
S

S= standard O=optional - = not available

VTR= Fibreglas MTS= multi-layered plywood



www.caravansinternational.it

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

		PROFILATI (FIAT)	LOW PROFILE (FIAT)	LOW PROFILE (FORD)
MAGIS FORD PACK ** LOW PROFILE	165 HP ENGINE WITH MANUAL TRANSMISSION - LIGHT DUTY HIGH SERIES HEADLIGHTS WITH STATIC CORNERING LIGHTS "TREND" INTERIORS AND INSTRUMENT PANEL BUMPERS AND SIDE MOULDINGS IN MATCHING BODY COLOUR XL 2-POINT DOOR LOCK WITH WINDOW AND CENTRAL LOCKING SYSTEM ANTHRACITE T5200 AWNING 4 M: 95, 85 - 4.5 M: 66, 67, 87, 82 - 5 M: 67 INTEGRAL, 87 INTEGRAL EXTERNAL GAS OUTLET + SHOWER IN GARAGE 200 W SOLAR PANEL WITH NEW MPPT CONTROLLER PLEATED BLIND	-	-	✓
SELEKT FORD PACK	AUTOMATIC TRANSMISSION (CHANGED TO 165 HP ENGINE WITH AUTOMATIC TRANSMISSION) SELEKT GRAPHICS	-	-	✓
DESIGN FORD PACK	CAB WITH MOONDUST SILVER METALLIC PAINT 16" BLACK ALLOY WHEELS	-	-	✓
EXTRA ASSISTANCE PACK	ELECTRIC WINDSCREEN DEFROSTER ADAPTIVE CRUISE CONTROL WITH LANE CENTRING AND STOP&GO PRE-COLLISION ASSIST 2.2 SPEED SIGN RECOGNITION #3, INTEGRATED WITH ADAP-IVE CRUISE CONTROL POWER-FOLDING MIRRORS WITH ELECTRIC DEFROSTER NAVIGATION CENTER		-	✓
FREEDOM PACK	2ND SOLAR PANEL 200 W WITH NEW MPPT CONTROLLER LITHIUM SERVICE BATTERY 2ND LITHIUM SERVICE BATTERY	✓	✓	✓
MAGIS FIAT PACK ** LOW PROFILE	FOG LIGHTS BUMPER IN MATCHING BODY COLOUR BLACK SKID PLATE 16" TWO-TONE ALLOY WHEELS LEATHER STEERING WHEEL AND GEAR LEVER COVER TECHNO DASHBOARD ELECTRIC HANDBRAKE TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR) XL 2-POINT DOOR LOCK WITH WINDOW AND CENTRAL LOCKING SYSTEM ANTHRACITE T5200 AWNING 4 M: 95, 85 - 4.5 M: 66, 67, 87, 82 - 5 M: 67 INTEGRAL, 87 INTEGRAL EXTERNAL GAS OUTLET + SHOWER IN GARAGE 200 W SOLAR PANEL WITH NEW MPPT CONTROLLER PLEATED BLIND	-	✓	-
EXTRA TECH PACK LOW PROFILE	FULL DIGITAL CLUSTER AUTOMATIC AIR CONDITIONING WIRELESS CHARGER FOR SMARTPHONES FULL LED HEADLIGHTS	-	✓	-
MAGIS FIAT PACK ** A-CLASS	FOG LIGHTS BUMPER IN MATCHING BODY COLOUR BLACK SKID PLATE 16" TWO-TONE ALLOY WHEELS LEATHER STEERING WHEEL AND GEAR LEVER COVER TECHNO DASHBOARD ELECTRIC HANDBRAKE TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR) XL 2-POINT DOOR LOCK WITH WINDOW AND CENTRAL LOCKING SYSTEM ANTHRACITE T5200 AWNING 4 M: 95, 85 - 4.5 M: 66, 67, 87, 82 - 5 M: 267 INTEGRAL, 287 INTEGRAL EXTERNAL GAS OUTLET + SHOWER IN GARAGE 200 W SOLAR PANEL WITH NEW MPPT CONTROLLER	✓	-	-
EXTRA TECH PACK A-CLASS	FULL DIGITAL CLUSTER AUTOMATIC AIR CONDITIONING WIRELESS CHARGER FOR SMARTPHONES	✓	-	-
SELEKT FIAT PACK	AUTOMATIC TRANSMISSION (CHANGED TO 140 HP ENGINE WITH AUTOMATIC TRANSMISSION - LIGHT DUTY) SELEKT GRAPHICS COMPOSITE SUSPENSIONS (NOT AVAILABLE ON HEAVY - 4.25 - 4.4 T)	✓	✓	-
PACK EXTRA SAFETY	ADAPTIVE CRUISE CONTROL FOR SPEED > 30 KM/H FULL BRAKE CONTROL WITH PEDESTRIAN DETECTION RAIN & LIGHT SENSORS LANE SUPPORT TRAFFIC SIGN RECOGNITION DRIVER DROWSINESS DETECTION INTELLIGENT SPEED ASSITS	✓	✓	-
32" DIGIT TV PACK	DIGITAL AERIAL TV ARM 32" SMART TV	✓	✓	✓
32" TV SAT PACK	SATELLITE AERIAL 32" TV ARM 32" SMART TV	✓	✓	✓
32" WI-FI TV PACK	WIFI ROUTER 32" TV ARM 32" SMART TV	✓	✓	✓

✓ = Disponibile O = Optional -- = Non disponibile



The masses indicated in this data sheets refer to the provisions of European Directive 2007/46/EC.

### **MASS IN RUNNING ORDER**

It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg). The mass in running order, and consequently the payload and/or certified seats may vary depending on the accessories installed.

### **PAYLOAD**

This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (driver excluded), and the personal effects.

The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional baggage.

All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC.

Any optional equipment increases the mass in running order and decreases the payload.

The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue. Additional accessories and devices reduce the payload by a quantity equal to their weight; the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers. In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please note that the law does not allow the maximum permissible mass to be exceeded, which can be consulted under the specific heading of the data sheets. Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle. The regulations and requirements of each country may entail changes in the characteristics of this table. The number of certified seats may vary depending on the traffic regulations in force in each country. When driving, the fresh water tank must be filled to a maximum of 20 litres.



[www.caravansinternational.it](http://www.caravansinternational.it)